



Underground Infrastructure Maintenance Solutions

Valve Exercising Equipment





Valve Exerciser - Model PT1000

Long Reach Arm w/GPS Option
0-850 Ft lbs of Torque




Power Head Slide Track: The power head is mounted to a carriage that smoothly rides the full length of the track. A deck mounted stowage system is furnished to secure arms for travel.

Reach: Power Head travels up to 8' from mounting base to exercise valves.

Global Positioning System (GPS) option: Instantly provides latitude, longitude and altitude.

Power Head: The valve exerciser power head is driven by a single hydraulic motor. Output torque can be controlled from 0 to 850 ft. lbs. Double chain drive provides more reliable long lasting operation.

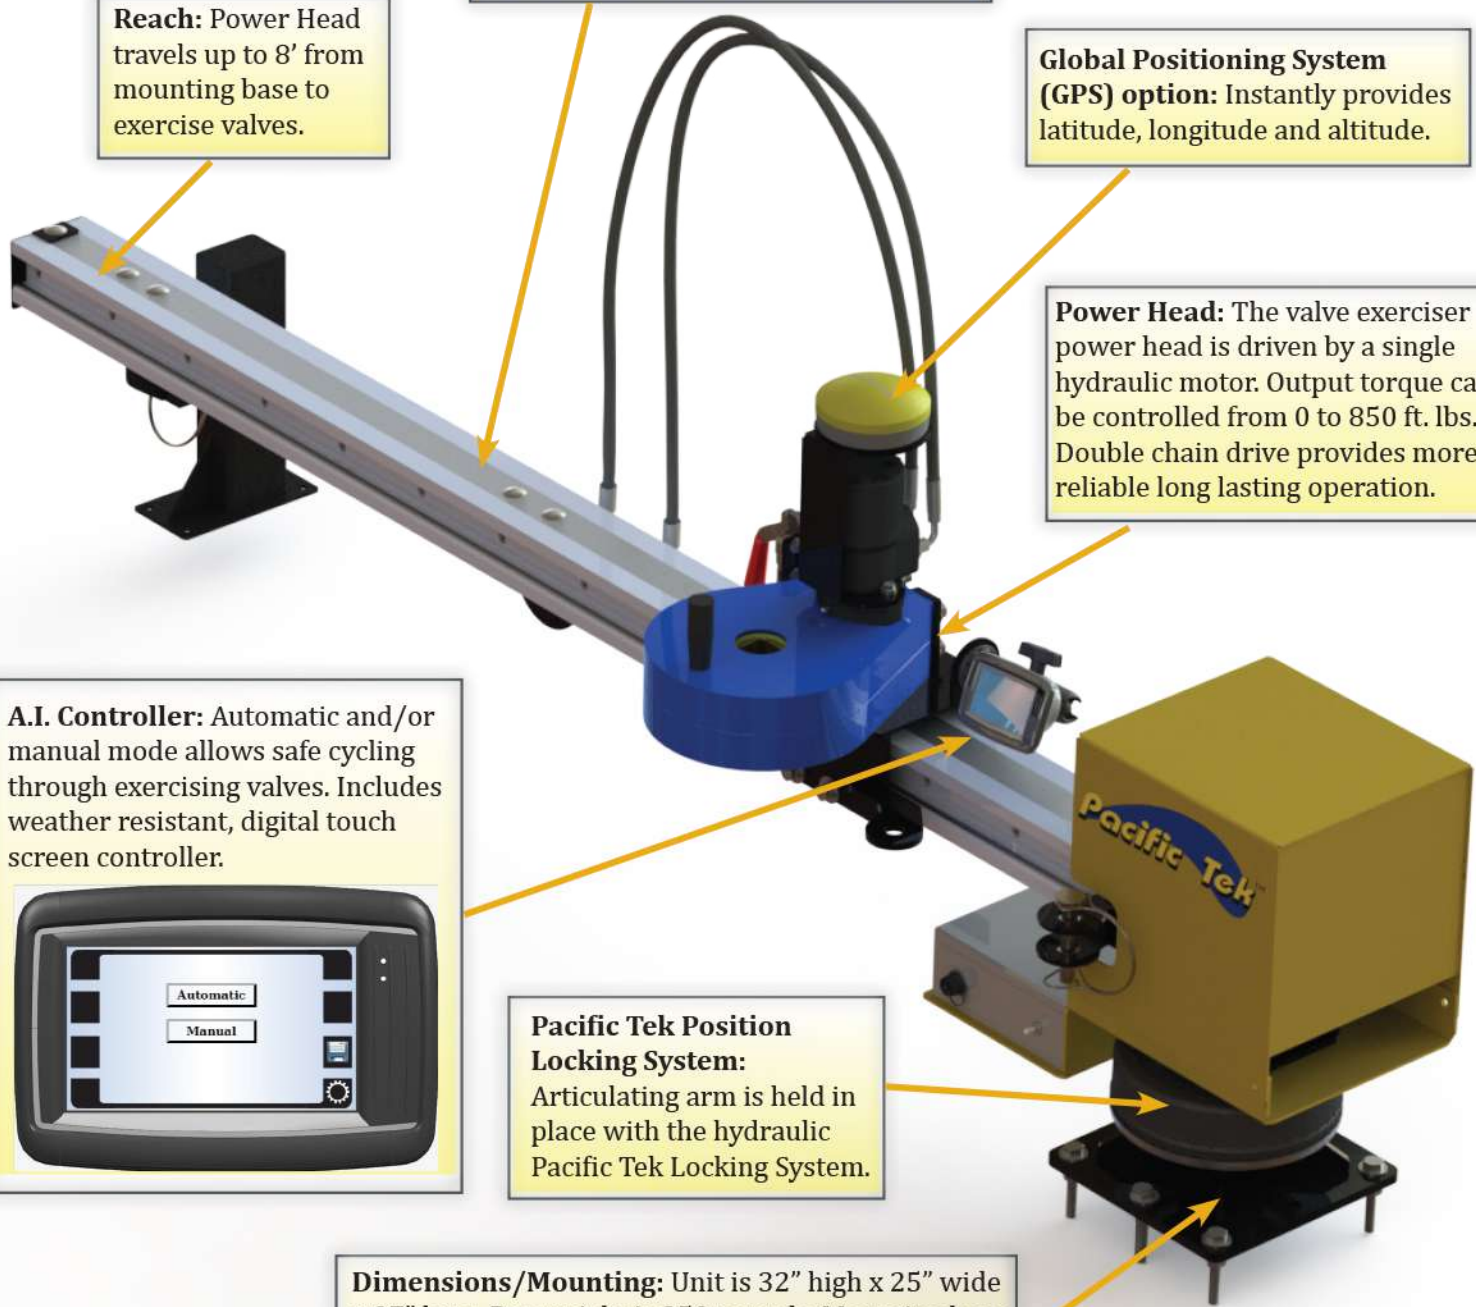

A.I. Controller: Automatic and/or manual mode allows safe cycling through exercising valves. Includes weather resistant, digital touch screen controller.



Pacific Tek Position Locking System: Articulating arm is held in place with the hydraulic Pacific Tek Locking System.

Dimensions/Mounting: Unit is 32" high x 25" wide x 97" long. Dry weight is 250 pounds. Mounting base is 1/2" thick square plate with a 1 1/2" pivot post for a swinger arm. Can be skid, truck or trailer mounted.

Patent Pending


PV100-PT26 Truck Mounted Vac & Valve w/Swinger Kit

Track and wheels allow the unit to swivel 180 degrees making it easier to position the Valve Exerciser over the valve or valve cluster



PT26 Swinger Kit is available truck or trailer mounted

PV250-PT1000 Trailer Mounted Vac & Valve

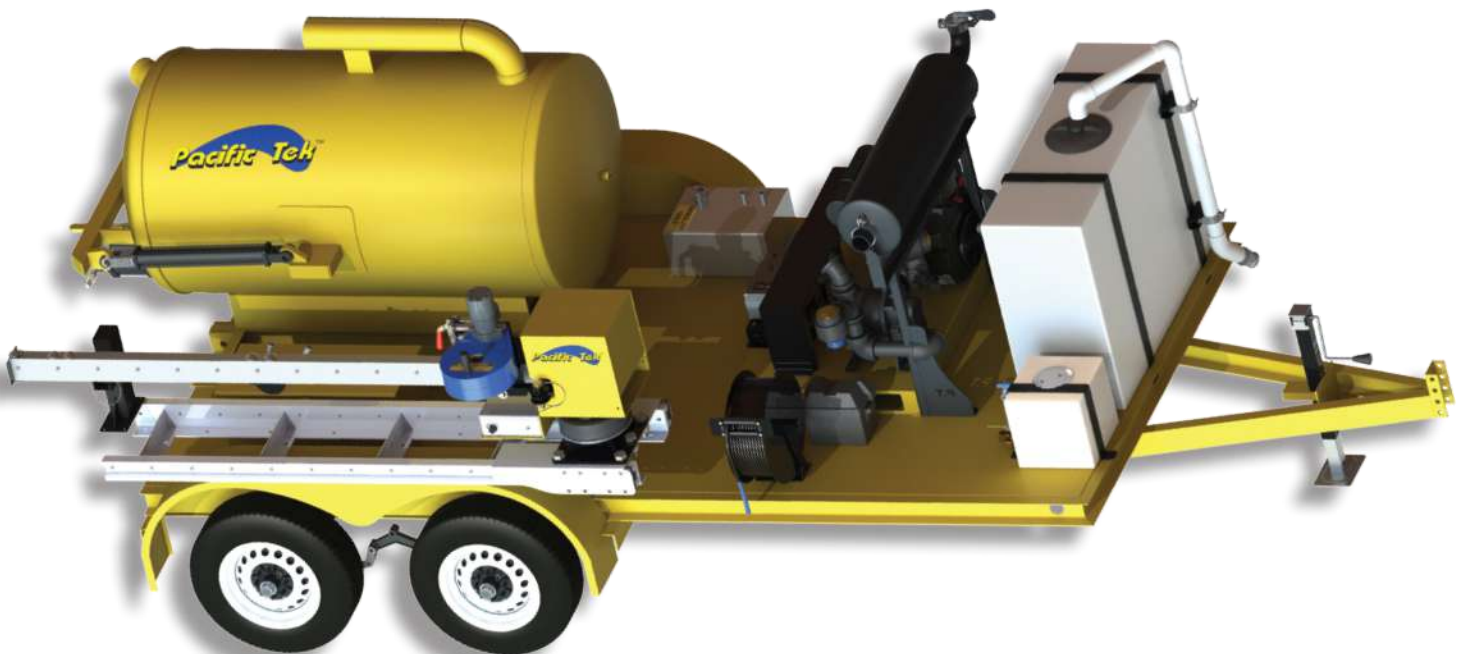



Valve Exerciser - Model PT26

High Torque Exerciser w/GPS Option
0-1800 Ft lbs of Torque



Global Positioning System (GPS) option: Instantly provides latitude, longitude and altitude.

Dimensions: 26" high x 22" wide x 51" long. Dry weight is 285 pounds.

A.I. Controller: Automatic and/or manual mode allows safe cycling through exercising valves. Includes weather resistant, digital touch screen controller.



Power Head: The valve exerciser power head is driven by a single hydraulic motor. Output torque can be controlled from 0 to 1800 ft. lbs. The power head is capable to work with up to 15 degrees of valve stem misalignment. The hydraulic power supply required is a Class II circuit, 8 GPM @ 2,000 PSI.


Sliding Rails: Square rails that roll on bearings inside of the mounting frame rail tubes allow the PT26 to extend the power head up to 30" for operation.

Power Coated: The frame assembly is powder coat painted for corrosion resistance.

Patent Pending



PT1000 front bumper mount and rear mounted rail system

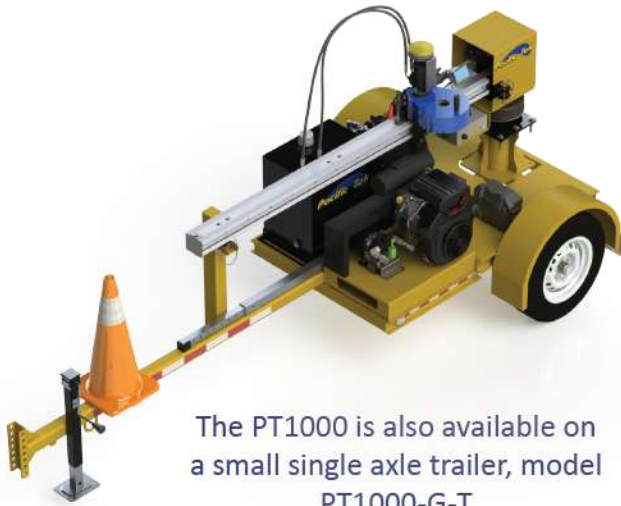

The PT1000 is also available on a small single axle trailer, model PT1000-G-T



Model PT8 Portable Hydraulic Valve Operator with PUG-06 Portable Cart

All Models Overview:

MODEL	TORQUE	MOUNTING
PT8:	0-300 ft. lbs.	Hand-held or Cart
PT1000:	0-850 ft. lbs.	Truck or Trailer
PT26:	0-1800 ft. lbs.	Truck or Trailer


Data collection is available for PT26 and PT1000



Proudly Made in the USA Since 1993

1298 N. Blue Gum St., Anaheim CA 92806
 (800) 884-5551 | (714) 835-3088 | Fax (714) 835-3091

For more information contact:

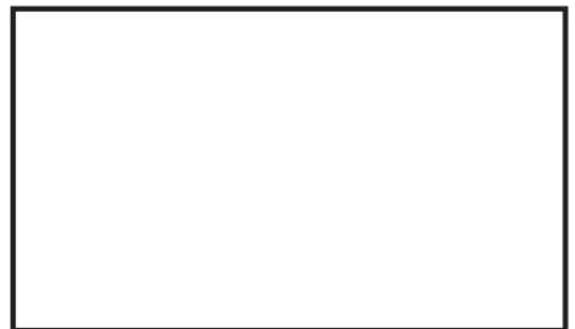

1705-Pac.TekValveEx.Bro